


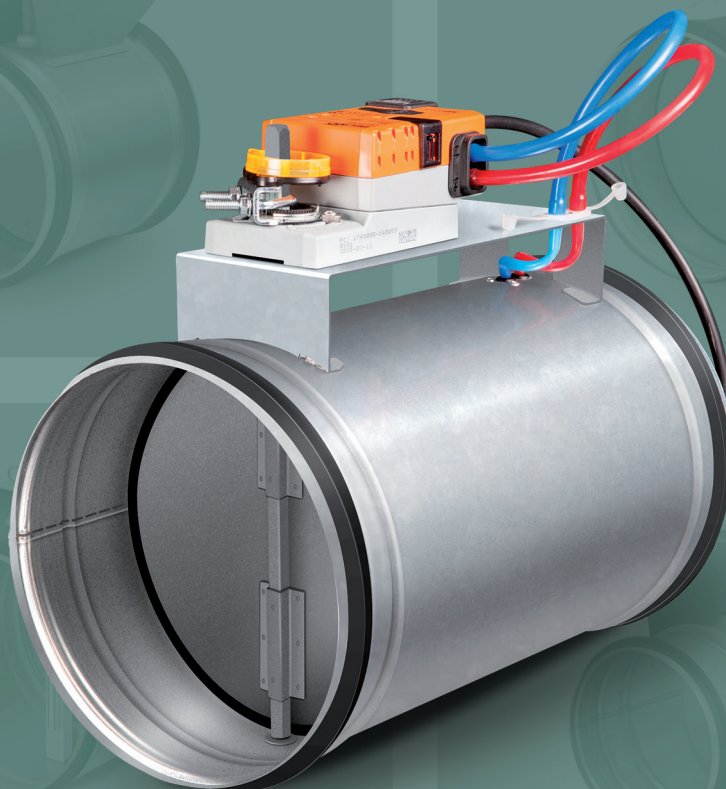

Environmental Product Declaration

In accordance with ISO14025:2006 and EN15804:2012+A2:2019

Owner of the declaration

Airvent Légtechnikai Zrt.

Program holder and publisher

The Norwegian EPD foundation

Issue date

24.06.2025

Product name

Dampers and Measuring units

Declaration number

NEPD-11519-11435

Valid to

24.06.2030

Declared unit

1 pc

Registration Number

NEPD-11519-11435

Product category /PCR

CEN Standard EN 15804:2012+A2:2019
serves as core PCR NPCR 030:2021
Part B for ventilation components

Contents

General information	3	LCA: Results	9
Manufacturer – Airvent	4	System boundaries	9
Towards a greener future	5	Core environmental impact indicators	9
Our efforts	5	Resource use	10
BASiQ-250	6	End of life – Waste	10
Pressure independent VAV control damper	6	End of life – output flow	10
Product – Airvent Dampers and Measuring units	6	Information describing the biogenic carbon content at the factory gate	10
LCA: Calculation rules	7	Additional requirements	11
System boundary	7	Greenhous gas emission from the use of electricity in the manufacturing phase	11
LCA: Scenarios and additional technical information	8	Additional environmental impact indicators required in NPCR Part A for construction products	11
Transport from production place to assembly/user (A4)	8	Dangerous substances	11
Transport to waste processing (C2)	8	Indoor environment	11
Benefits and loads beyond the system boundaries (D)	8	Included products and multiplication factors	12
		Bibliography	13

General information

Product

Dampers and Measuring units (represented by BASiQ-250)

Program holder

The Norwegian EPD Foundation
Post Box 5250 Majorstuen, 0303 Oslo, Norway
Phone: +47 23 08 80 00
E-mail: post@epd-norge.no

Declaration Number

NEPD-11519-11435

This declaration is based on Product Category Rules

CEN Standard EN 15804:2012+A2:2019 serves as core
PCR NPCR 030:2021 Part B for ventilation components

Statements

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer, life cycle assessment data and evidences.

Declared unit

1 pc BASiQ-250

Declared unit with option

A1-A3, A4, A5, C1, C2, C3, C4, D

Functional unit

Not relevant. Use phase not included.

Verification

Independent verification of the declaration and data, according to ISO14025:2010

☐ Internal ☒ External

Owner of the declaration

Airvent Légtechnikai Zrt
Contact person: Krisztián Buczkó
Phone: +36 30 395 3011
e-mail: avkecskemmet@airvent.hu

Manufacturer

Airvent Légtechnikai Zrt
6000 Kecskemét, Belsőnyír 150, Hungary
E-mail: avkecskemmet@airvent.hu
Phone: +36 30 395 3011

Place of production

Airvent Légtechnikai Zrt.
6000 Kecskemét, Belsőnyír 150, Hungary

Management system

ISO 9001, ISO 14001 and ISO 50001

Organisation No.

556478-8428

Issue date

24.06.2025

Valid to

24.06.2030

Year of study

2024-2025

Comparability

EPD of construction products may not be able to compare if they do not comply with EN 15804 and are seen in a building context.

The EPD has been worked out by

Kaspars Zudrags, BM Certification SIA

Silvia Vilčeková, SILCERT Ltd
Independent verifier approved by EPD Norway



Approved



Manager of EPD Norway

Manufacturer – Airvent

We develop and manufacture technically advanced products for ventilation and air handling systems, prioritizing air quality, performance, and sustainable engineering



40 years of experience in the field of ventilation.



Expertise in well-designed, streamlined ventilation products and solutions, offering high performance, functionality and build quality.



In our 12,000 sqm production facility, we manufacture over 500,000 products on an annual basis.



We are committed to develop innovative solutions that are energy-efficient, healthy, and environmentally friendly.



Towards a greener future

Since 2004, Airvent Zrt. has operated a certified ISO 14001 *Environmental Management System*, with sustainability and environmental protection being key considerations in our developments. As a responsible company, energy-efficient system solutions have always been a top priority in our expansions. In line with this approach, we equipped our new *Competence Center* building in 2022 with a 50 kWp solar power system, and by the end of 2024, we will install an additional 100 kWp solar system on the roofs of our production halls. With this development, we will generate 22% of our electricity needs in-house. We also monitor our electricity consumption online with 25 sub-meters, allowing us to immediately address any wastage and ensure that our energy usage is always as optimal as possible.

Our efforts

We extend our environmentally friendly efforts to product delivery as well. We send over a hundred trucks annually to our affiliate in Sweden. Previously, these trucks drove across Europe, but we now use intermodal transport, with 75 percent of the journey being made by rail.

One of the focuses of our product development is to increase the use of sustainable materials in our products and processes while minimizing environmental impact, all the while ensuring we deliver flawless products to our customers with consistent quality. By transitioning to a new insulating material made from recycled materials in production, we are able to meet all three of these criteria




Product – Airvent dampers and measuring units



BASiQ-250

Pressure independent VAV control damper

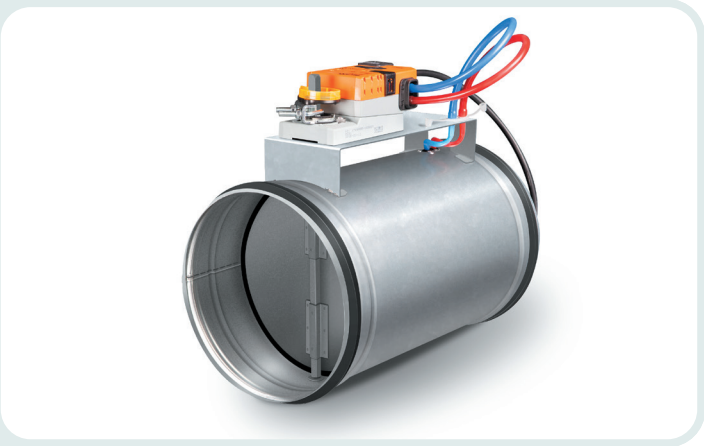

Product description

Our dampers and measuring units, used to regulate and control airflows, are primarily manufactured from galvanized steel and are available in various sizes, tailored to different applications. The production methods and materials across this product family are largely consistent. This EPD provides an average environmental performance for our product range, as outlined below in the table **including products and multiplication factors**.

The Life Cycle Assessment (LCA) is based on data specific to the representative product, BASiQ-250. While BASiQ is our most common damper, the 250 size is both widely sold and represents an average within the size range (Ø100-630). Its typical material composition and production impact make it a reliable reference for evaluating the environmental performance of the entire damper and measuring unit product family.

Product specification

Materials	kg	%
Steel	2.79	90
Aluminium	0.06	2
Plastic	0.20	6
EPDM	0.05	2
TOTAL	3.10	
Packaging – corrugated board	0.24	

Dimensions (mm)

Ø100	Ø200	Ø400
Ø125	Ø250	Ø500
Ø160	Ø315	Ø630

Airflow range

26 - 7855 m³ /h (7 - 2182 l/s)

Materials

Housing and damper blade of galvanized sheet steel.
The damper blade is equipped with a rubber sealing.
Measuring device of aluminum, with silicone rubber tubes.

Market

Europe

Reference service life

>25 years

Description and function

BASiQ is a pressure-independent variable air volume control damper with a built-in measuring device, that can be used for demand-controlled applications controlling the air volume in circular duct systems. The unit is optimal for schools, commercial buildings, offices, etc. The use of BASiQ should be avoided in humid, cold or aggressive environments. The unit is suitable for both supply- and extract air.

BASiQ consists of a damper, measuring device and an actuator with integrated flow controller. The damper has leakage class 4, due to the efficient and tight shutoff mode of the airflow. The requested airflow range of the minimum and maximum values is set at the factory. BASiQ may not be installed in locations with temperatures below 0 °C or where the ambient or air temperature exceeds 50 °C.

LCA: Calculation rules

Declared units

One damper – BASiQ-250 (mass 3.10 kg)

Cut-off criteria

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) are not included. These cut-off criteria do not apply for hazardous materials and substances.

Allocation

Allocation is done following EN 15804+A2:2019 guidelines, with incoming energy, water, and waste generated on-site being evenly distributed among all products through mass allocation. The environmental impacts of producing recycled materials are attributed to the primary product in which they are utilized. Additionally, the recycling process and transportation of materials are taken into account in this analysis.

Data quality

The specific data on the product composition represent the production of the declared product and were collected for EPD development from January 1, 2024, to December 31, 2024.

Materials	Source	Data quality	Year
Steel	ecoinvent 3.10.1	Database	2024
Aluminium	ecoinvent 3.10.1	Database	2024
Plastic	ecoinvent 3.10.1	Database	2024
EPDM	ecoinvent 3.10.1	Database	2024
Corrugated board	ecoinvent 3.10.1	Database	2024

System boundary

Cradle to gate with options, modules C1–C4, module D (A1–A3 + A4 + A5 + C + D).

A1–A3


Product stage



- A1 Production of input materials for the product
- A2 Transport of raw materials
- A3 Manufacturing of the product

A4–A5


Construction stage

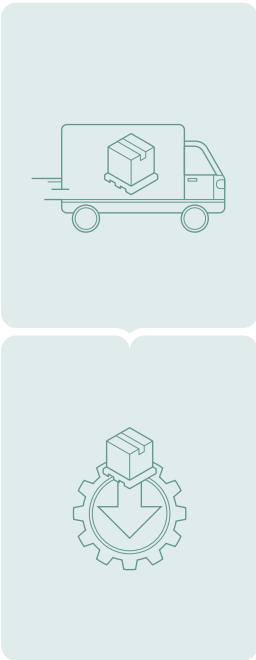

- A4 Transport to market
- A5 Installation

B1–B7


Use stage

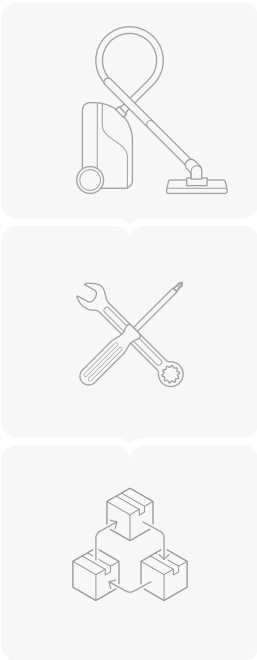

- B2 Maintenance
- B3 Repair
- B4 Replacement

C1–C4

End of life

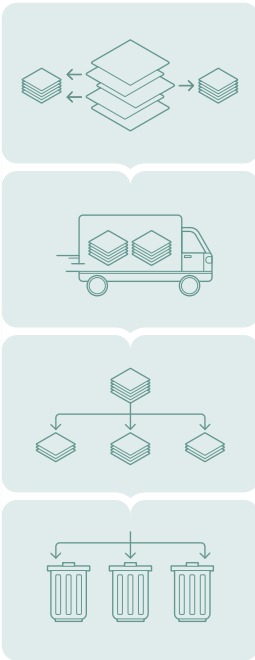

- C1 Deconstruction/demolition
- C2 Transport to waste processing
- C3 Waste processing
- C4 Disposal

D

Beyond system boundaries



- D Environmental impact of outgoing streams

LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

Energy sources of the electricity used in manufacturing processes of module A3 are modeled using the mix of electricity, the average 0,456kg CO₂ eq./kWh. A4: Transport scenarios include EURO 6 truck transport for 307 km, sea ferry 158 km, train 747 km. A5: The energy consumption of A5 and C1 model is considered negligible and module A5 includes only packaging utilization. C1: No loads in C1 have been generated as manual dismantling. C2: Transport to waste treatment site after dismantling using EURO 6 truck average (100 km assumed). C3: Assumed as 90% of commissioning box is recycling. C4: Assumed as 10% of commissioning box materials are goes to the landfill. D: Modeled as 90% of commissioning box is recycling.

Transport from production place to assembly/user (A4)

Type	Capacity utilisation (incl. return) [%]	Type of vehicle	Distance KM	Fuel/Energy consumption	Value [l/t]
Truck	36.7	lorry 16-32 metric ton, EURO6	307	0.043	13.20
Railway	50	rail	747	0.002	1.49
Boat	50	ship	158	0.030	4.74

Assembly (A5)

	Unit	Value
Packaging cardboard, recycled – 89%	kg	0.55
Packaging cardboard, landfill – 5.5%	m ³	0.03
Packaging cardboard, incertation – 5.5%	kWh	0.03

End of Life (C1, C3, C4)

	Unit	Value
Treatment of waste reinforcement steel, recycling	kg	2.54
Treatment of waste plastic, municipal incineration	kg	0.25
Treatment of scrap steel, landfill	kg	0.28

Transport to waste processing (C2)

Type	Capacity utilisation (incl. return) [%]	Type of vehicle	Distance KM	Fuel/Energy consumption	Value [l/t]
Truck	36.7	lorry 16-32 metric ton, EURO5	100	0.043	13.20

Benefits and loads beyond the system boundaries (D)

	Unit	Value
Substitution of steel production	kg	2.54
Substitution of paper production	kg	0.24
Substitution of heat production	MJ	7.43
Substitution of thermal energy production	MJ	1.32

LCA: Results

System boundaries

X=included, MID=module not declared, MIR=module not relevant

Product stage			Assembly stage		Use stage							End of life stage				Beyond system boundaries
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	MID	MID	MID	MID	MID	MID	MID	X	X	X	X	X

Core environmental impact indicators

Parameter	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP-total	kg CO ₂ -eq.	1.16E+01	3.62E-01	3.74E-01	0.00E+00	6.32E-02	9.52E-01	3.31E-03	-3.81E+00
GWP-fossil	kg CO ₂ -eq.	1.19E+01	3.62E-01	5.61E-03	0.00E+00	6.30E-02	9.52E-01	3.32E-03	-3.72E+00
GWP-biogenic	kg CO ₂ -eq.	-2.91E-01	1.27E-04	3.68E-01	0.00E+00	1.43E-05	6.76E-05	5.17E-06	-8.08E-02
GWP-lulAC	kg CO ₂ -eq.	1.89E-02	2.19E-04	4.72E-06	0.00E+00	2.83E-05	3.22E-05	3.22E-06	-8.83E-03
ODP	kg CFC11-eq.	6.12E-07	5.85E-09	3.36E-11	0.00E+00	9.32E-10	3.35E-09	7.89E-11	-2.23E-08
AP	mol H ⁺ eq.	1.38E-01	3.18E-03	3.12E-05	0.00E+00	2.15E-04	1.83E-03	2.15E-05	-1.88E-02
EP-freshwater	kg N eq.	4.01E-03	3.57E-05	1.52E-06	0.00E+00	4.91E-06	8.60E-06	3.92E-07	-2.10E-03
EP-marine	kg N eq.	1.41E-02	9.52E-04	3.18E-05	0.00E+00	7.07E-05	8.60E-04	8.59E-06	-3.83E-03
EP-terrestrial	mol N eq.	4.20E-01	1.05E-02	8.85E-05	0.00E+00	7.70E-04	9.18E-03	8.55E-05	-4.15E-02
POCP	kg NMVOC eq.	4.25E-02	3.26E-03	3.33E-05	0.00E+00	3.16E-04	2.72E-03	2.91E-05	-1.46E-02
ADP-minerals&metals*	kg Sb eq.	4.75E-04	9.67E-07	5.16E-08	0.00E+00	1.76E-07	1.41E-07	7.02E-09	-4.11E-05
ADP-fossil*	MJ	1.67E+02	4.80E+00	4.67E-02	0.00E+00	9.16E-01	2.77E+00	6.92E-02	-4.58E+01
WDP*	m ³	5.07E+00	3.16E-02	1.94E-03	0.00E+00	4.52E-03	5.70E-02	7.81E-04	-1.56E+00

GWP-total: Global Warming Potential; GWP-fossil: Global Warming Potential fossil fuels; GWP-biogenic: Global Warming Potential biogenic; GWP-LULUC: Global Warming Potential land use and land use change; ODP: Depletion potential of the stratospheric ozone layer; AP: Acidification potential, Accumulated Exceedance; EP-freshwater: Eutrophication potential, fraction of nutrients reaching freshwater end compartment; See "additional requirements" for indicator given as PO4 eq. EP-marine: Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-terrestrial: Eutrophication potential, Accumulated Exceedance; POCP: Formation potential of tropospheric ozone; ADP-M&M: Abiotic depletion potential for non-fossil resources (minerals and metals); ADP-fossil: Abiotic depletion potential for fossil resources; WDP: Water deprivation potential, deprivation weighted water consumption

Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009

Resource use

Parameter	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
RPEE	MJ	1.18E+01	1.27E-01	-3.95E+00	0.00E+00	1.26E-02	2.40E-02	1.25E-03	-9.83E+00
RPEM	MJ	3.51E+00	0.00E+00	-3.51E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	-5.00E-02
TPE	MJ	1.53E+01	1.27E-01	-7.46E+00	0.00E+00	1.26E-02	2.40E-02	1.25E-03	-9.88E+00
NRPE	MJ	1.67E+02	4.80E+00	4.67E-02	0.00E+00	9.16E-01	-8.91E+00	6.92E-02	-5.75E+01
NRPM	MJ	3.35E+00	0.00E+00	1.31E-05	0.00E+00	0.00E+00	-3.00E+00	-3.35E-01	1.17E+01
TRPE	MJ	1.71E+02	4.80E+00	4.67E-02	0.00E+00	9.16E-01	-1.19E+01	-2.65E-01	-4.58E+01
SM	kg	8.63E-01	3.65E-03	1.22E-04	0.00E+00	3.90E-04	1.16E-03	2.13E-05	2.48E+00
RSF	MJ	2.42E-02	2.34E-05	5.74E-07	0.00E+00	4.96E-06	8.85E-06	3.69E-07	-3.59E-04
NRSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
W	m ³	2.48E-01	8.11E-04	-1.35E-05	0.00E+00	1.35E-04	1.40E-03	-1.97E-04	-2.94E-02

RPEE Renewable primary energy resources used as energy carrier; RPEM Renewable primary energy resources used as raw materials; TPE Total use of renewable primary energy resources; NRPE Non renewable primary energy resources used as energy carrier; NRPM Non renewable primary energy resources used as materials; TRPE Total use of non renewable primary energy resources; SM Use of secondary materials; RSF Use of renewable secondary fuels; NRSF Use of non renewable secondary fuels; W Use of net fresh water

End of life – Waste

Parameter	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
HW	kg	4.62E+00	1.20E-02	8.35E-04	0.00E+00	1.55E-03	1.61E-02	2.51E-04	-1.44E+00
NHW	kg	2.97E+01	2.16E-01	9.63E-02	0.00E+00	2.87E-02	3.99E-01	3.47E-01	-1.19E+01
RW	kg	1.00E-03	2.03E-06	5.36E-08	0.00E+00	1.95E-07	3.70E-07	2.08E-08	-2.24E-05

HW Hazardous waste disposed; NHW Non hazardous waste disposed; RW Radioactive waste disposed

End of life – output flow

Parameter	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
CR	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
MR	kg	2.50E-01	0.00E+00	2.18E-01	0.00E+00	0.00E+00	2.21E+00	0.00E+00	0.00E+00
MER	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.85E-01	0.00E+00	0.00E+00
EEE	MJ	0.00E+00	0.00E+00	5.30E-02	0.00E+00	0.00E+00	1.32E+00	0.00E+00	0.00E+00
ETE	MJ	0.00E+00	3.02E-08	2.98E-01	0.00E+00	5.53E-09	7.43E+00	0.00E+00	0.00E+00

CR Components for reuse; MR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy

Information describing the biogenic carbon content at the factory gate

Biogenic carbon content	Unit	Value
Biogenic carbon content in product	kg C	0
Biogenic carbon content in the accompanying packaging	kg C	0.36

Additional requirements

Greenhouse gas emission from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

Electricity mix	Data source	Amount	Unit
Electricity production, hard coal	ecoinvent 3.10.1	1.1	g CO ₂ eq./kWh
Electricity production, nuclear, pressure water reactor	ecoinvent 3.10.1	0.0071	g CO ₂ eq./kWh
Electricity production, photovoltaic	ecoinvent 3.10.1	0.0833	g CO ₂ eq./kWh
Electricity production, hydro, run-of-river	ecoinvent 3.10.1	0.0044	g CO ₂ eq./kWh

Additional environmental impact indicators required in NPCR Part A for construction products

In order to increase the transparency of biogenic carbon contribution to climate impact, the indicator GWP-IOBC is required as it declares climate impacts calculated according to the principle of instantaneous oxidation. GWP-IOBC is also referred to as GWP-GHG in context to Swedish public procurement legislation.

Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP-IOBC	kg CO ₂ eq.	1.19E+01	3.62E-01	5.61E-03	0.00E+00	6.32E-02	9.52E-01	3.32E-03	3.73E+00

GWP-IOBC Global warming potential calculated according to the principle of instantaneous oxidation.

Dangerous substances

The product contains no substances given by the REACH Candidate list or the Norwegian priority list.

Indoor environment

The product meets the requirements for low emissions.

Included products and multiplication factors

The multiplication factors in the table below can be used to scale LCA data for another product or size.

<i>Name</i>	<i>Factor</i>	<i>Name</i>	<i>Factor</i>	<i>Name</i>	<i>Factor</i>	<i>Name</i>	<i>Factor</i>
BASiQ		CERTiQ-CS / CERTiQ-F		LOGiQ-CS/-F-250	1,13	SPT	
BASiQ-100	0,45	CERTiQ-CS/-F-100	0,68	LOGiQ-CS/-F-315	1,61	SPT-100	0,32
BASiQ-125	0,52	CERTiQ-CS/-F-125	0,74	LOGiQ-CS/-F-400	2,55	SPT-125	0,35
BASiQ-160	0,61	CERTiQ-CS/-F-160	0,84	LOGiQ-CS/-F-500	3,61	SPT-160	0,39
BASiQ-200	0,74	CERTiQ-CS/-F-200	0,97	LOGiQ-CS/-F-630	5,19	SPT-200	0,52
BASiQ-250	1,00	CERTiQ-CS/-F-250	1,23	LOGiQ-M		SPT-250	0,61
BASiQ-315	1,48	CERTiQ-CS/-F-315	1,71	LOGiQ-M-100	0,26	SPT-315	1,03
BASiQ-400	2,42	CERTiQ-CS/-F-400	2,65	LOGiQ-M-125	0,29	SPT-400	1,52
BASiQ-500	3,48	CERTiQ-CS/-F-500	3,71	LOGiQ-M-160	0,32	SPT-500	2,03
BASiQ-630	5,06	CERTiQ-CS/-F-630	5,29	LOGiQ-M-200	0,35	SPT-630	2,71
BASiQ-F		CERTiQ-M		LOGiQ-M-250	0,42	VAVBAS	
BASiQ-F-100	0,45	CERTiQ-M-100	0,32	LOGiQ-M-315	0,68	VAVBAS-100	0,29
BASiQ-F-125	0,52	CERTiQ-M-125	0,35	LOGiQ-M-400	0,87	VAVBAS-125	0,35
BASiQ-F-160	0,61	CERTiQ-M-160	0,39	LOGiQ-M-500	1,03	VAVBAS-160	0,44
BASiQ-F-200	0,74	CERTiQ-M-200	0,45	LOGiQ-M-630	1,29	VAVBAS-200	0,56
BASiQ-F-250	1,00	CERTiQ-M-250	0,52	LOGiQ-PM		VAVBAS-250	0,81
BASiQ-F-315	1,48	CERTiQ-M-315	0,61	LOGiQ-PM-100	0,58	VAVBAS-315	1,32
BASiQ-F-400	2,42	CERTiQ-M-400	0,84	LOGiQ-PM-125	0,65	VAVBAS-400	2,26
BASiQ-F-500	3,48	CERTiQ-M-500	1,13	LOGiQ-PM-160	0,74	VAVBAS-500	3,31
BASiQ-F-630	5,06	CERTiQ-M-630	1,39	LOGiQ-PM-200	0,87	VAVBAS-630	4,90
BASiQ-FT		CERTiQ-PM		LOGiQ-PM-250	1,13	ZM	
BASiQ-FT-100	0,19	CERTiQ-PM-100	0,68	LOGiQ-PM-315	1,61	ZM-100	0,15
BASiQ-FT-125	0,23	CERTiQ-PM-125	0,74	LOGiQ-PM-400	2,55	ZM-125	0,18
BASiQ-FT-160	0,26	CERTiQ-PM-160	0,84	LOGiQ-PM-500	3,61	ZM-160	0,19
BASiQ-FT-200	0,32	CERTiQ-PM-200	0,97	LOGiQ-PM-630	5,19	ZM-200	0,24
BASiQ-FT-250	0,39	CERTiQ-PM-250	1,23	LOGiQ-S		ZM-250	0,32
BASiQ-FT-315	0,48	CERTiQ-PM-315	1,71	LOGiQ-S-100	0,42	ZM-315	0,40
BASiQ-FT-400	0,71	CERTiQ-PM-400	2,65	LOGiQ-S-125	0,48	ZM-400	0,65
BASiQ-FT-500	1,00	CERTiQ-PM-500	3,71	LOGiQ-S-160	0,58	ZM-500	0,92
BASiQ-FT-630	1,26	CERTiQ-PM-630	5,29	LOGiQ-S-200	0,71	ZM-630	1,16
BASiQ-P		DUO		LOGiQ-S-250	0,97	ZMC	
BASiQ-P-100	0,39	DUO-100	0,31	LOGiQ-S-315	1,45	ZMC-100	0,27
BASiQ-P-125	0,42	DUO-125	0,34	LOGiQ-S-400	2,39	ZMC-125	0,32
BASiQ-P-160	0,48	DUO-160	0,44	LOGiQ-S-500	3,45	ZMC-160	0,39
BASiQ-P-200	0,58	DUO-200	0,53	LOGiQ-S-630	5,03	ZMC-200	0,50
BASiQ-P-250	0,74	KNXiQ		SPA		ZMC-250	0,73
BASiQ-P-315	1,06	KNXiQ-100	0,47	SPA-100	0,32	ZMC-315	1,13
BASiQ-P-400	1,61	KNXiQ-125	0,53	SPA-125	0,35	ZMC-400	1,97
BASiQ-P-500	2,32	KNXiQ-160	0,63	SPA-160	0,39	ZMC-500	2,84
BASiQ-P-630	3,32	KNXiQ-200	0,76	SPA-200	0,52	ZMC-630	4,19
CERTiQ-D		KNXiQ-250	1,02	SPA-250	0,61	ZMS	
CERTiQ-D-100	0,58	KNXiQ-315	1,53	SPA-315	1,03	ZMS-100	0,13
CERTiQ-D-125	0,61	KNXiQ-400	2,47	SPA-400	1,52	ZMS-125	0,18
CERTiQ-D-160	0,65	KNXiQ-500	3,92	SPA-500	2,03	ZMS-160	0,24
CERTiQ-D-200	0,77	KNXiQ-630	5,15	SPA-630	2,71	ZMS-200	0,34
CERTiQ-D-250	0,87	LOGiQ-CS / LOGiQ-F		SPD		ZMS-250	0,48
CERTiQ-D-315	1,29	LOGiQ-CS/-F-100	0,58	SPD-100	0,37	ZMS-315	0,76
CERTiQ-D-400	1,77	LOGiQ-CS/-F-125	0,65	SPD-125	0,42	ZMS-400	1,37
CERTiQ-D-500	2,29	LOGiQ-CS/-F-160	0,74	SPD-160	0,44	ZMS-500	2,19
CERTiQ-D-630	2,97	LOGiQ-CS/-F-200	0,87	SPD-200	0,53	ZMS-630	3,12

Bibliography

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations
- Principles and procedures

ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines

EN 15804:2012+A2:2019 Sustainability of construction works - Environmental product declarations
- Core rules for the product category of construction products.

NPCR Part A Construction products and services. Ver. 2.0. March 2021, EPD-Norge.

NPCR 026 Part B for Furniture. Ver. 2.0 March 2022, EPD-Norge.

LCA background report 10.10.2024.

 Global Program Operator	Program Operator		
	The Norwegian EPD Foundation	tel	+47 23 08 80 00
	Post Box 5250 Majorstuen, 0303 Oslo	e-mail	post@epd-norge.no
	Norway	web	www.epd-norge.no
	Publisher	tel	+47 23 08 80 00
	The Norwegian EPD Foundation		
	Owner of the declaration		
	Airvent Légtechnikai Zrt.	tel	+36 76 481 650
	6000 Kecskemét, Belsőnyír 150.	e-mail	info@airvent.hu
	Hungary	web	www.airvent.hu
	Author of the life cycle assessment		
	K. Zudrags	tel	+371 67772135
	BM Certification SIA	e-mail	info@bmcertification.com
	Latvia	web	www.bmcertification.com
	ECO Platform	web	www.eco-platform.org
	ECO Portal	web	ECO Portal

EPD for the best environmental decision

